

TEST REPORT

Report No.: BCTC2212304056S

Applicant: Shenzhen Blueberl Electronic Technology Co., Ltd.


Product Name: smart watch

Product Type: EW54C

Tested Date: 2022-12-13 to 2022-12-14

Issued Date: 2022-12-16

Shenzhen BCTC Testing Co., Ltd.

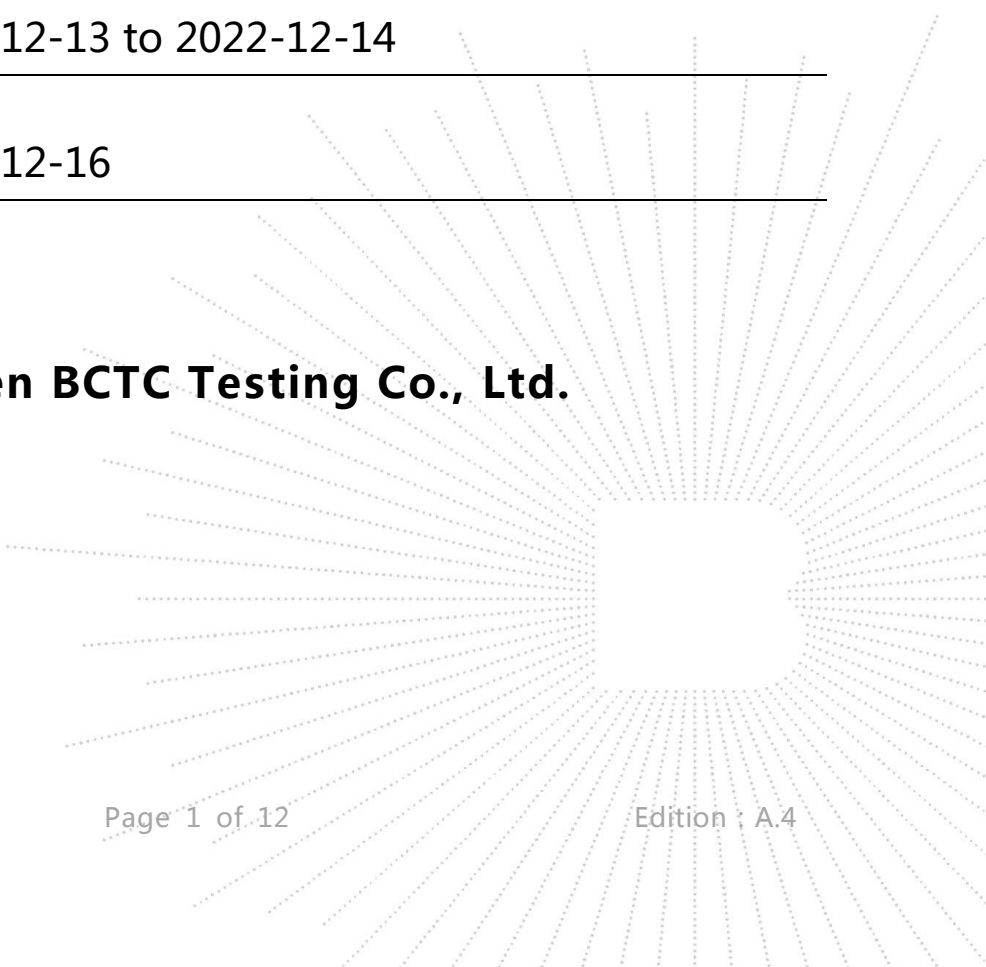

IP CODE Report
IEC 60529
Degrees of protection provided by enclosures

Report Reference No.	BCTC2212304056S
Date of issue	2022-12-16
Total number of pages	12 pages
Testing laboratory	Shenzhen BCTC Testing Co., Ltd.
Address	1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China
Applicant	Shenzhen Blueberl Electronic Technology Co., Ltd.
Address	3F, Building U3, U8 Intelligent Manufacturing Park, Hangcheng Avenue, Shenzhen, China
Standard	IEC 60529:1989+A1:1999+A2:2013
Test procedure.....	Compliance with IEC 60529:1989+A1:1999+A2:2013
Procedure deviation	N.A.
Non-standard test method	N.A.
Type of test object	smart watch
Trademark	BlueTi
Manufacturer	Shenzhen Blueberl Electronic Technology Co., Ltd.
Address	3F, Building U3, U8 Intelligent Manufacturing Park, Hangcheng Avenue, Shenzhen, China
Model/type reference	EW54C EW50, EW12PRO, EW39, EW46, EW54C, EW54, EW67, iw8 Ultra, watch Ultra, watch8, EW59, EW60, C60, S80, EW33, EW30, RS-05, RS-06
IP CODE	IP67
Test Result	P(Pass)



Testing procedure and testing location:


Testing Laboratory : **Shenzhen BCTC Testing Co., Ltd.**
Address..... : 1-2/F., Building B, Pengzhou Industrial Park, No.158,
Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an
District, Shenzhen, Guangdong, China

Pual Zhong

Tested by (name, function, signature)... : (Project Handler)

-----
Sam Wang


Approved by (name, function, signature)
..... : (Reviewer)

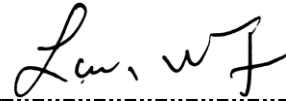

Possible test case verdicts :	
test case does not apply to the test object	: N(.A.)
test object does meet the requirement	: P(ass)
test object does not meet the requirement	: F(all)

General remarks:	
<p>"(see remark #)" refers to a remark appended to the report.</p> <p>"(see appended table)" refers to a table appended to the report.</p> <p>Throughout this report a comma is used as the decimal separator.</p> <p>The test results presented in this report relate only to the object tested.</p> <p>This report shall not be reproduced except in full without the written approval of the testing laboratory.</p> <p>Full test on model EW54C.</p>	<p>Attached with: Photo</p>

TEC
TC
OVB
檢

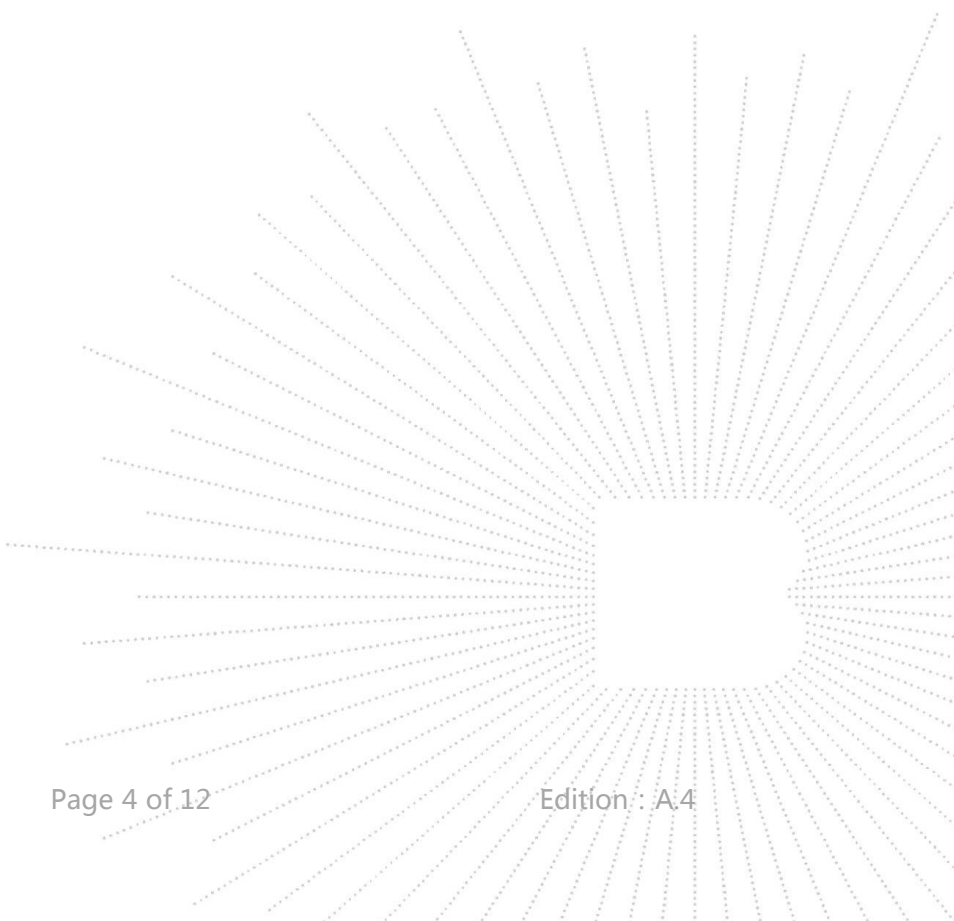

IEC 60529			
Clause	Requirement – Test	Result - Remark	Verdict
5	Degrees of protection against access to hazardous parts and against solid foreign objects indicated by the first characteristic numeral		P
5.1	Protection against access to hazardous parts		P
	First characteristic numeral is 6 Protected against access to hazardous parts with a wire. The access probe of 1,0 mm shall not penetrate		P
5.2	Protection against access solid foreign objects		P
	First characteristic numeral is 6 Dust-tight No ingress of dust		P
6	Degrees of protection against ingress of water indicated by the second characteristic numeral		P
	Second characteristic numeral is 7 Protected against the effects of temporary immersion in water	Ingress of water in quantities causing harmful effects shall not be possible when the enclosure is temporary Immersed in water under standardized conditions of pressure and time	P
10	Marking		P
	The requirements for marking shall be specified in the relevant product standard. Where appropriate, such a standard should also specify the method of marking which is to be used when - one part of an enclosure has a different degree of protection to that of another part of the same enclosure; - the mounting position has an influence on the degree of protection; -the maximum immersion depth and time are indicated.		P
11	General requirements for tests		P
11.1	Atmospheric conditions for water or dust Tests: Temperature range: Relative humidity: 25% to 75% Air pressure: 15 °C to 35 °C 86 kPa to 106 kPa (860 mbar to 1 060 mbar).		P
11.2	Test samples The tests specified in this standard are type tests.		P
12	Tests for protection against access to hazardous parts indicated by the first characteristic numeral		P
12.1	Access probes The test wire of 1,0 mm shall not penetrate and adequate clearance shall be kept		P
12.2	Test conditions		P

	<p>For tests on low-voltage equipment, a low-voltage supply (of not less than 40 V and not more than 50 V) in series with a suitable lamp should be connected between the probe and the hazardous parts inside the enclosure. Hazardous live parts covered only with varnish or paint, or protected by oxidation or by a similar process, are covered by a metal foil electrically connected to those parts which are normally live in operation.</p> <p>The signal-circuit method should also be applied to the hazardous moving parts of high-voltage equipment. Internal moving parts may be operated slowly, where this is possible.</p>																																		
12.3	<p>Acceptance conditions: The protection is satisfactory if adequate clearance is kept between the access probe and hazardous parts.</p>		P																																
13	<p>Tests for protection against solid foreign objects indicated by the first characteristic numeral</p>		P																																
13.1 & 13.2	<p>Test means & Test conditions Test means and the main test conditions are given in Table VII</p> <p>Table 7 – Test means for the tests for protection against solid foreign objects</p> <table border="1"> <thead> <tr> <th>First characteristic numeral</th> <th>Test means (object probes and dust chamber)</th> <th>Test force</th> <th>Test conditions, see</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>No test required</td> <td>–</td> <td>–</td> </tr> <tr> <td>1</td> <td>Rigid sphere without handle or guard 50^{+0.05}₀ mm diameter</td> <td>50 N ± 10 %</td> <td>13.2</td> </tr> <tr> <td>2</td> <td>Rigid sphere without handle or guard 12,5^{+0.2}₀ mm diameter</td> <td>30 N ± 10 %</td> <td>13.2</td> </tr> <tr> <td>3</td> <td>Rigid steel rod 2,5^{+0.05}₀ mm diameter with edges free from burrs</td> <td>3 N ± 10 %</td> <td>13.2</td> </tr> <tr> <td>4</td> <td>Rigid steel rod 1,0^{+0.05}₀ mm diameter with edges free from burrs</td> <td>1 N ± 10 %</td> <td>13.2</td> </tr> <tr> <td>5</td> <td>Dust chamber figure 2, with or without underpressure</td> <td>–</td> <td>13.4 + 13.5</td> </tr> <tr> <td>6</td> <td>Dust chamber figure 2, with underpressure</td> <td>–</td> <td>13.4 + 13.6</td> </tr> </tbody> </table>	First characteristic numeral	Test means (object probes and dust chamber)	Test force	Test conditions, see	0	No test required	–	–	1	Rigid sphere without handle or guard 50 ^{+0.05} ₀ mm diameter	50 N ± 10 %	13.2	2	Rigid sphere without handle or guard 12,5 ^{+0.2} ₀ mm diameter	30 N ± 10 %	13.2	3	Rigid steel rod 2,5 ^{+0.05} ₀ mm diameter with edges free from burrs	3 N ± 10 %	13.2	4	Rigid steel rod 1,0 ^{+0.05} ₀ mm diameter with edges free from burrs	1 N ± 10 %	13.2	5	Dust chamber figure 2, with or without underpressure	–	13.4 + 13.5	6	Dust chamber figure 2, with underpressure	–	13.4 + 13.6		P
First characteristic numeral	Test means (object probes and dust chamber)	Test force	Test conditions, see																																
0	No test required	–	–																																
1	Rigid sphere without handle or guard 50 ^{+0.05} ₀ mm diameter	50 N ± 10 %	13.2																																
2	Rigid sphere without handle or guard 12,5 ^{+0.2} ₀ mm diameter	30 N ± 10 %	13.2																																
3	Rigid steel rod 2,5 ^{+0.05} ₀ mm diameter with edges free from burrs	3 N ± 10 %	13.2																																
4	Rigid steel rod 1,0 ^{+0.05} ₀ mm diameter with edges free from burrs	1 N ± 10 %	13.2																																
5	Dust chamber figure 2, with or without underpressure	–	13.4 + 13.5																																
6	Dust chamber figure 2, with underpressure	–	13.4 + 13.6																																
13.3	<p>Acceptance conditions for first characteristic numerals 1,2,3,4 The protection is satisfactory if the full diameter of the probe specified in Table VII does not pass through any opening.</p>		N																																
13.4	<p>Dust test for first characteristic numerals 5 and 6 The test is made using a dust chamber incorporating the basic principles shown in figure 2 whereby the powder circulation pump may be replaced by other means suitable to maintain the talcum powder in suspension in a closed test chamber. The talcum powder used shall be able to pass through a square-meshed sieve the nominal wire diameter of which is 50µm and the nominal width of a gap between wires 75µm. The amount of talcum powder to be used is 12kg per cubic metre of the test chamber volume. It shall not have been used for more than 20 tests.</p>		P																																
14	<p>Tests for protection against water indicated by the second characteristic numeral</p>		P																																

CO., LTD

14.1	<p>Test means & Test conditions Test means and the main test conditions are given in Table VIII</p> <p style="text-align: center;">Table 8 – Test means and main test conditions for the tests for protection against water</p> <table border="1" data-bbox="336 376 903 1043"> <thead> <tr> <th>Second characteristic numeral</th> <th>Test means</th> <th>Water flow rate</th> <th>Duration of test</th> <th>Test conditions, see</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>No test required</td> <td>–</td> <td>–</td> <td>–</td> </tr> <tr> <td>1</td> <td>Drip box Figure 3 Enclosure on turntable</td> <td>$1^{+0.5}_0$ mm/min</td> <td>10 min</td> <td>14.2.1</td> </tr> <tr> <td>2</td> <td>Drip box Figure 3 Enclosure in 4 fixed positions of 15° tilt</td> <td>$2^{+0.5}_0$ mm/min</td> <td>2,5 min for each position of tilt</td> <td>14.2.2</td> </tr> <tr> <td>3</td> <td>Oscillating tube Figure 4 Spray ± 60° from vertical, distance max. 200 mm or Spray nozzle Figure 5 Spray ± 60° from vertical</td> <td>0,07 l/min ± 5 % per hole, multiplied by number of holes 10 l/min ± 5 %</td> <td>10 min 1 min/m² at least 5 min</td> <td>14.2.3 a) 14.2.3 b)</td> </tr> <tr> <td>4</td> <td>As for numeral 3 Spray ± 180° from vertical</td> <td>As for numeral 3</td> <td></td> <td>14.2.4</td> </tr> <tr> <td>5</td> <td>Water jet hose nozzle Figure 5 Nozzle 6,3 mm diameter, distance 2,5 m to 3 m</td> <td>12,5 l/min ± 5 %</td> <td>1 min/m² at least 3 min</td> <td>14.2.5</td> </tr> <tr> <td>6</td> <td>Water jet hose nozzle Figure 6 Nozzle 12,5 mm diameter, distance 2,5 m to 3 m</td> <td>100 l/min ± 5 %</td> <td>1 min/m² at least 3 min</td> <td>14.2.6</td> </tr> <tr> <td>7</td> <td>Immersion tank Water-level on enclosure: 0,15 m above top 1 m above bottom</td> <td>–</td> <td>30 min</td> <td>14.2.7</td> </tr> <tr> <td>8</td> <td>Immersion tank Water-level: by agreement</td> <td>–</td> <td>by agreement</td> <td>14.2.8</td> </tr> <tr> <td>9</td> <td>Fan jet nozzle Figure 7 Test of small enclosure on turntable Figure 12 Turntable speed (5 ± 1) r/min Spray at 0°, 30°, 60°, 90° Or Test of large enclosures as per intended use Spray from all practical directions Distance (175 ± 25) mm</td> <td>(15 ± 1) l/min</td> <td>30 s per position 1 min/m² at least 3 min</td> <td>14.2.9 a) 14.2.9 b)</td> </tr> </tbody> </table>	Second characteristic numeral	Test means	Water flow rate	Duration of test	Test conditions, see	0	No test required	–	–	–	1	Drip box Figure 3 Enclosure on turntable	$1^{+0.5}_0$ mm/min	10 min	14.2.1	2	Drip box Figure 3 Enclosure in 4 fixed positions of 15° tilt	$2^{+0.5}_0$ mm/min	2,5 min for each position of tilt	14.2.2	3	Oscillating tube Figure 4 Spray ± 60° from vertical, distance max. 200 mm or Spray nozzle Figure 5 Spray ± 60° from vertical	0,07 l/min ± 5 % per hole, multiplied by number of holes 10 l/min ± 5 %	10 min 1 min/m ² at least 5 min	14.2.3 a) 14.2.3 b)	4	As for numeral 3 Spray ± 180° from vertical	As for numeral 3		14.2.4	5	Water jet hose nozzle Figure 5 Nozzle 6,3 mm diameter, distance 2,5 m to 3 m	12,5 l/min ± 5 %	1 min/m ² at least 3 min	14.2.5	6	Water jet hose nozzle Figure 6 Nozzle 12,5 mm diameter, distance 2,5 m to 3 m	100 l/min ± 5 %	1 min/m ² at least 3 min	14.2.6	7	Immersion tank Water-level on enclosure: 0,15 m above top 1 m above bottom	–	30 min	14.2.7	8	Immersion tank Water-level: by agreement	–	by agreement	14.2.8	9	Fan jet nozzle Figure 7 Test of small enclosure on turntable Figure 12 Turntable speed (5 ± 1) r/min Spray at 0°, 30°, 60°, 90° Or Test of large enclosures as per intended use Spray from all practical directions Distance (175 ± 25) mm	(15 ± 1) l/min	30 s per position 1 min/m ² at least 3 min	14.2.9 a) 14.2.9 b)		P
Second characteristic numeral	Test means	Water flow rate	Duration of test	Test conditions, see																																																						
0	No test required	–	–	–																																																						
1	Drip box Figure 3 Enclosure on turntable	$1^{+0.5}_0$ mm/min	10 min	14.2.1																																																						
2	Drip box Figure 3 Enclosure in 4 fixed positions of 15° tilt	$2^{+0.5}_0$ mm/min	2,5 min for each position of tilt	14.2.2																																																						
3	Oscillating tube Figure 4 Spray ± 60° from vertical, distance max. 200 mm or Spray nozzle Figure 5 Spray ± 60° from vertical	0,07 l/min ± 5 % per hole, multiplied by number of holes 10 l/min ± 5 %	10 min 1 min/m ² at least 5 min	14.2.3 a) 14.2.3 b)																																																						
4	As for numeral 3 Spray ± 180° from vertical	As for numeral 3		14.2.4																																																						
5	Water jet hose nozzle Figure 5 Nozzle 6,3 mm diameter, distance 2,5 m to 3 m	12,5 l/min ± 5 %	1 min/m ² at least 3 min	14.2.5																																																						
6	Water jet hose nozzle Figure 6 Nozzle 12,5 mm diameter, distance 2,5 m to 3 m	100 l/min ± 5 %	1 min/m ² at least 3 min	14.2.6																																																						
7	Immersion tank Water-level on enclosure: 0,15 m above top 1 m above bottom	–	30 min	14.2.7																																																						
8	Immersion tank Water-level: by agreement	–	by agreement	14.2.8																																																						
9	Fan jet nozzle Figure 7 Test of small enclosure on turntable Figure 12 Turntable speed (5 ± 1) r/min Spray at 0°, 30°, 60°, 90° Or Test of large enclosures as per intended use Spray from all practical directions Distance (175 ± 25) mm	(15 ± 1) l/min	30 s per position 1 min/m ² at least 3 min	14.2.9 a) 14.2.9 b)																																																						
14.2	Test conditions		P																																																							
14.2.7	<p>Test for second characteristic numeral 7: Temporary immersion between 0.15m and 1m The test is made by completely immersing the enclosure in water in its service position as specified by the manufacturer so that the following conditions are satisfied:</p> <ol style="list-style-type: none"> the lowest point of enclosures with a height less than 850mm is located 1000mm below the surface of the water the highest point of enclosures with a height equal to or greater than 850mm is located 150mm below the surface of the water the duration of the test is 30 min the water temperature does not differ from that of the equipment by more than 5K. However, a modified requirement may be specified in the relevant product standard if the tests are to be made when the equipment is energized and/or its parts in motion. 		P																																																							
14.3	<p>Acceptance conditions After testing in accordance with the appropriate requirements of 14.2.7 the enclosure shall be inspected for ingress of water. It is the responsibility of the relevant Technical Committee to specify the amount of water which may be allowed to enter the enclosure and the details of a dielectric strength test, if any. In general, if any water has entered, it shall not:</p> <ul style="list-style-type: none"> -be sufficient to interfere with the correct operation of the equipment or impair safety; - deposit on insulation parts where it could lead to tracking along the creepage distances; 	No ingress of water	P																																																							



	<p>- reach live parts or windings not designed to operate when wet; - accumulate near the cable end or enter the cable if any.</p> <p>If the enclosure is provided with drain-holes, it should be proved by inspection that any water which enters does not accumulate and that it drains away without doing any harm to the equipment.</p> <p>For enclosures without drain-holes, the relevant product standard shall specify the acceptance conditions if water can accumulate to reach live parts.</p>		
--	--	--	--

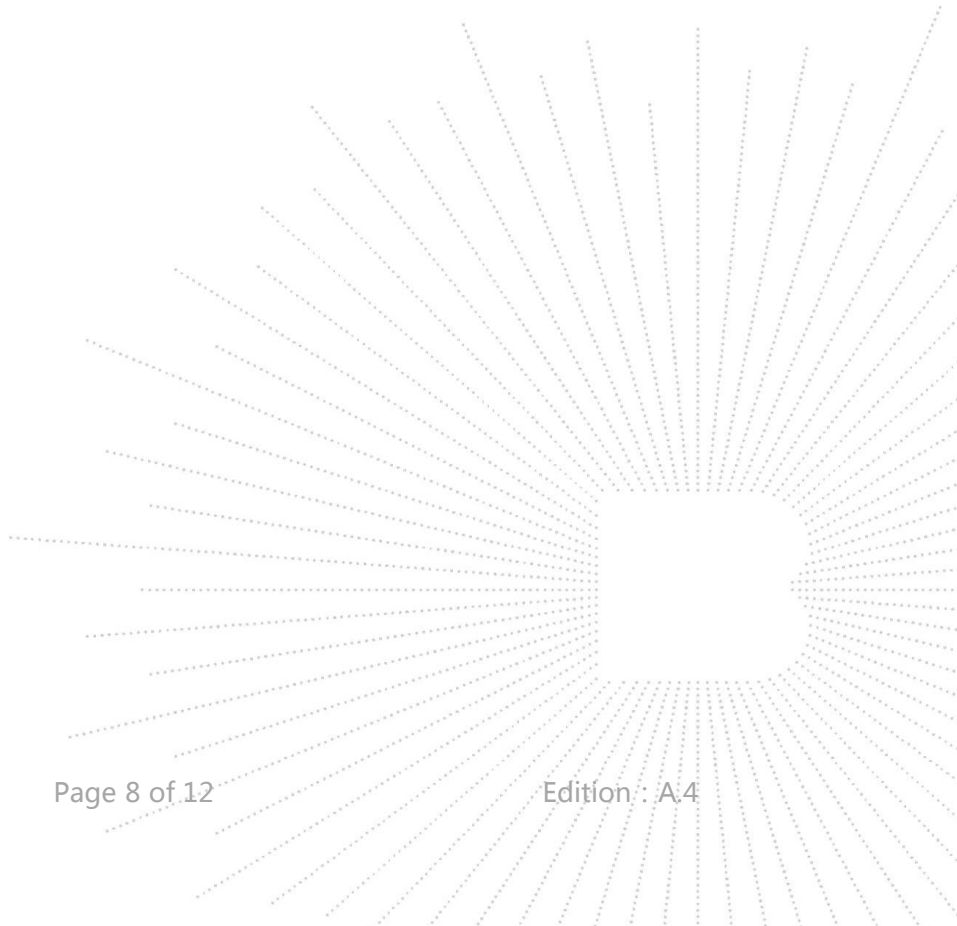


Photo:


EUT Photo 1



EUT Photo 2




TC
3C
PPR
測

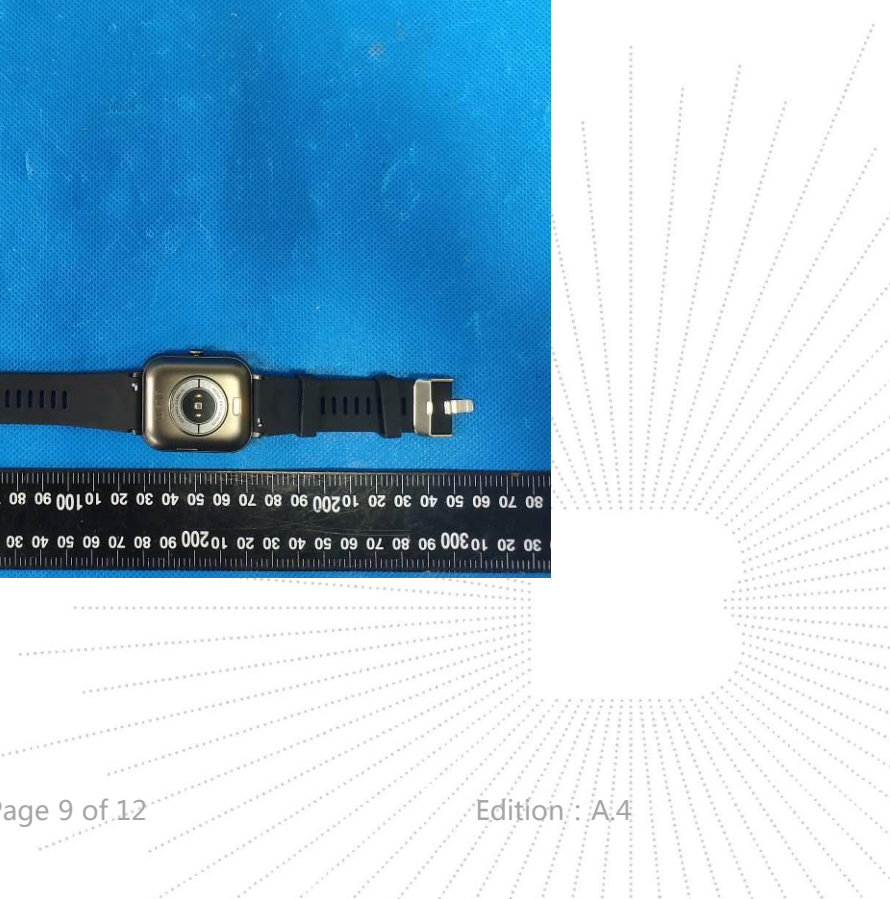

EUT Photo 3



EUT Photo 4

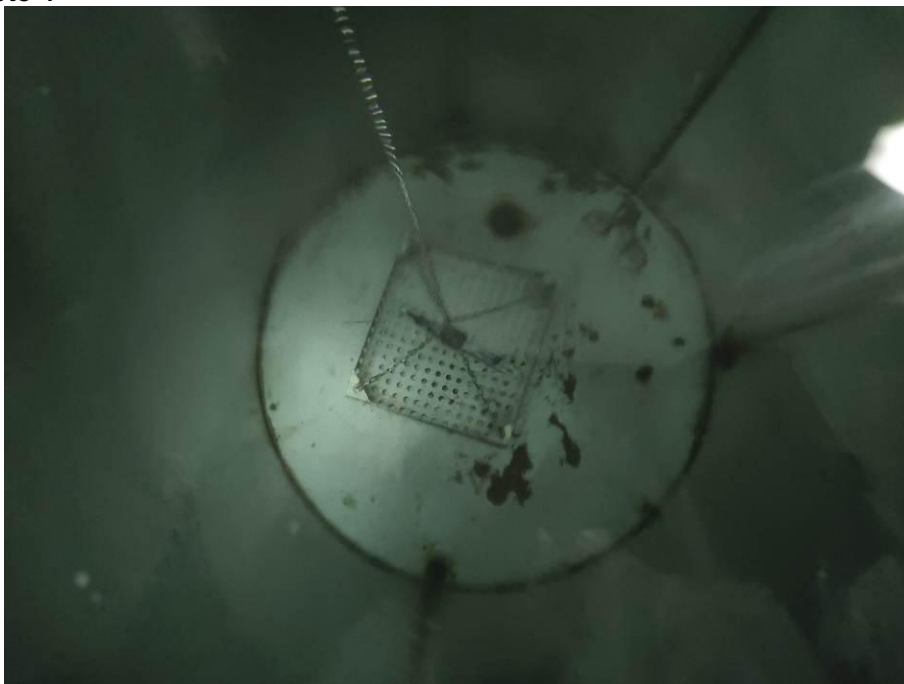

TEC
TC
OVE
檢



EUT Photo 5



(After the test)



STATEMENT

1. The equipment lists are traceable to the national reference standards.
2. The test report can not be partially copied unless prior written approval is issued from our lab.
3. The test report is invalid without the "special seal for inspection and testing".
4. The test report is invalid without the signature of the approver.
5. The test process and test result is only related to the Unit Under Test.
6. Sample information is provided by the client and the laboratory is not responsible for its authenticity.
7. The quality system of our laboratory is in accordance with ISO/IEC17025.
8. If there is any objection to this test report, the client should inform issuing laboratory within 15 days from the date of receiving test report.

Address:

1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China
TEL : 400-788-9558

P. C.: 518103

FAX : 0755-33229357

Website : <http://www.chnbctc.com>

E-Mail : bctc@bctc-lab.com.cn

***** END *****